



NEX^eLITE

Motorized Flying Sail Furlers

OPERATING FLYING SAILS SAFELY AND WITHOUT EFFORT

NEW benefits of the NEX^elite range

- 1 range - 2 models
- **Compact & light system**
- **Easy to install** with new socket
- **Reliable & proven** technology (NDE2)
- Installation on bowsprit & below the deck
- **Motorization kit:** to convert a manual furler
- **Protection** cover with handle & storage bag included

Why choose a motorized flying sail furler?

- **Easy operations** and **without effort**
- **Safety:** operations from the cockpit
- Ideal for solo or short-handed sailing
- **Fast furling operation** (around 45 sec)
- **Easy to install**
- No accidental release of the sail
- Low power consumption & minimal noise
- **Reliable:** Tested in all weather conditions
- No maintenance
- 2 year worldwide warranty




2 models available

NEX^eLITE 4.0

New: NEX^eLITE 6.5

Types of sails & max sail area




➤ **Gennaker, Code 0**

➤ **Max sail area:**

• **NEX^eLITE 4.0: 140 sqm**

• **NEX^eLITE 6.5: 250 sqm**





NEX^eLITE

Motorized Flying Sail Furlers

	NEX ^e	
	NEX ^e LITE 4.0	NEX ^e LITE 6.5
Boat length	from 11.5 m to 16 m	from 16 m to 20m
Gennaker max sail area	140 m ²	250 m ²
Asymetric spinnaker	200 m ²	280 m ²
Pin diameter	12 mm	14 mm
Power	400 W	800 W
Power supply	12V & 24V	12V & 24V
Circuit breaker	40A / 12V 30A / 24V	60A / 12V 30A / 24V
Optimal rotating speed	85 rpm (12V)	110 rpm
Power consumption	12V: 20 - 25 A / h 24V: 10 - 12.5 A / h	12V: 40 - 45 A / h 24V: 20 - 22.5 A / h
Cable length	7 m	7 m
Motor unit weight	5 Kg	8 Kg
Power supply box	incl.	incl.
Worldwide warranty	2 year	2 year



Protection:
Included a cover protection and a storage bag



New socket -
Easy installation on board.
Optimized dimensions

Accessories


- Wired remote controller Part # 53320
- Radio remote controller Part # 53310



NEX^eLITE 4.0



For sail area above 250 sqm, we recommend the model NEX^e8.0.

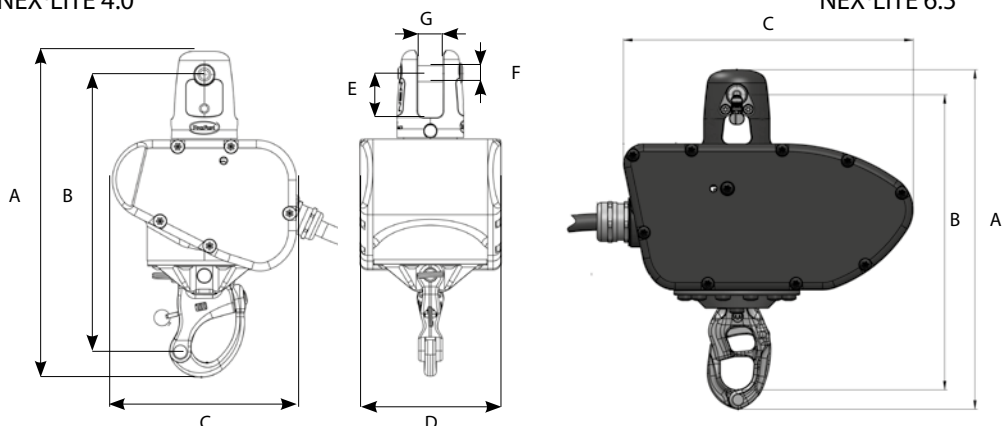

	Nex ^e lite 4.0	Nex ^e lite 6.5
A	244 mm	269 mm
B	216 mm	234 mm
C	138 mm	230 mm
D	106 mm	120 mm
E	33 mm	39 mm
F	12 mm	14 mm
G	19 mm	26 mm

